


SPECIFICATIONS


Light Source	LED
Veg Coverage	5' x 5'
Bloom Coverage	4' x 4'
Light Output PPF	1890 µmol/s
Efficacy PPE	2.7 µmol/J
AC Input Power	700W
AC Input Voltage	120-277V AC, 50/60Hz
Light Distribution	120°
Mounting Height	12" - 24" (30.48cm - 60.96cm) Above Canopy
Thermal Management	Passive
Max Ambient Temperature	95° F / 35° C
Dimming	0 - 10V
Total Harmonic Distortion (THD)	15%
Lifetime	L90 > 50,000hrs
Certifications	UL 8800, UL 1598
Warranty	5 Year Standard Warranty

Product is wattage adjustable. Range can be adjusted from 100W - 700W
NOMINAL ELECTRICAL AC INPUT*

AC Voltage	120V	240V	277V
AC Current	6.13A	3.02A	2.6A
AC Power	735W	725W	720W
Power Factor	0.98	0.95	0.97

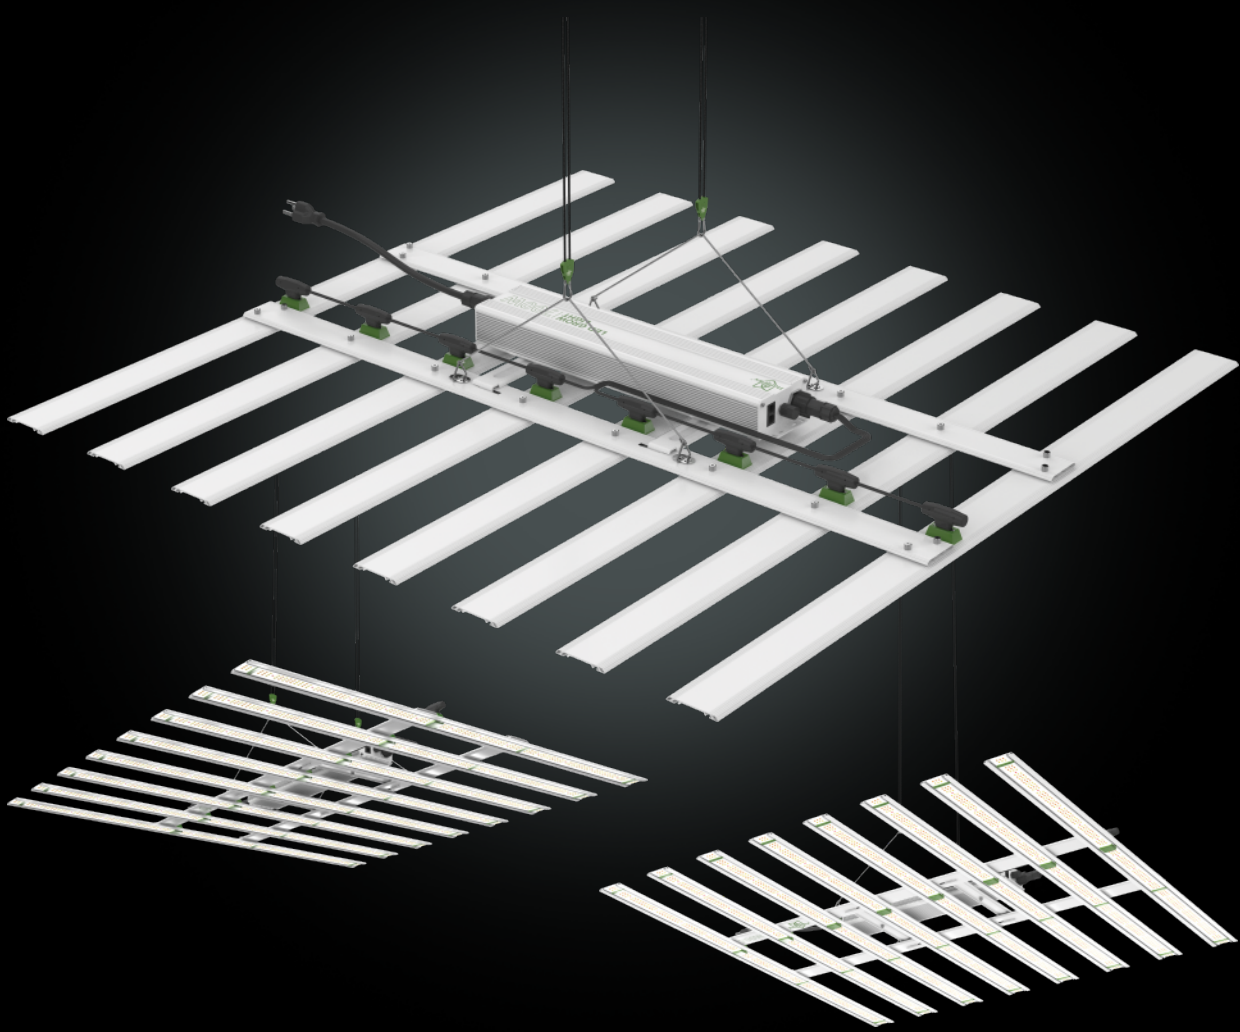

Certified by DLC Hort and rebate-eligible.
Scan to find out more.

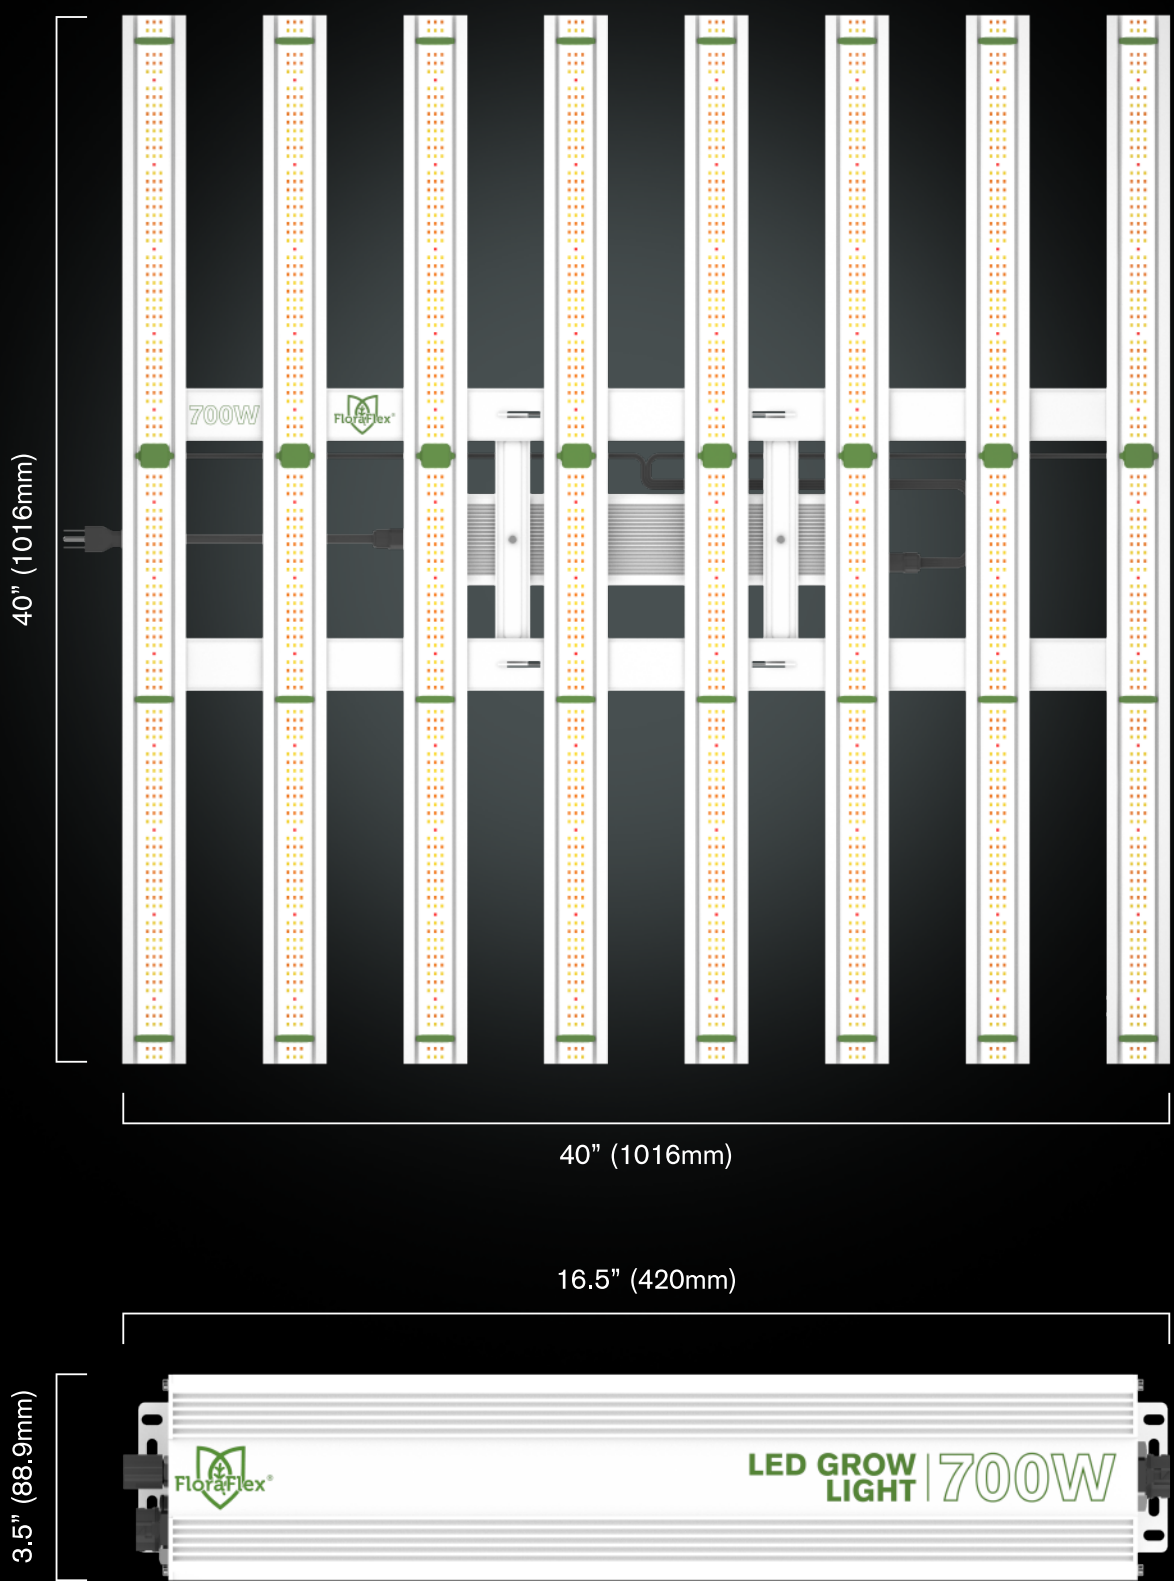


WEIGHTS & DIM'S

NET WT. 15.43 LB'S (7 KG)
GROSS WT. 17.64 LB'S (8 KG)
LENGTH: 41.57" (1056 MM)
WIDTH: 7.28" (185 MM)
HEIGHT: 7.48" (190 MM)

GUARANTEED BY:


FLORAFLEX CORP.
4804 LAUREL CANYON BLVD.,
SUITE 1047, STUDIO CITY, CA 91607
WWW.FLORAFLEX.COM
855-855-1053

PPFD CHART @ 12"

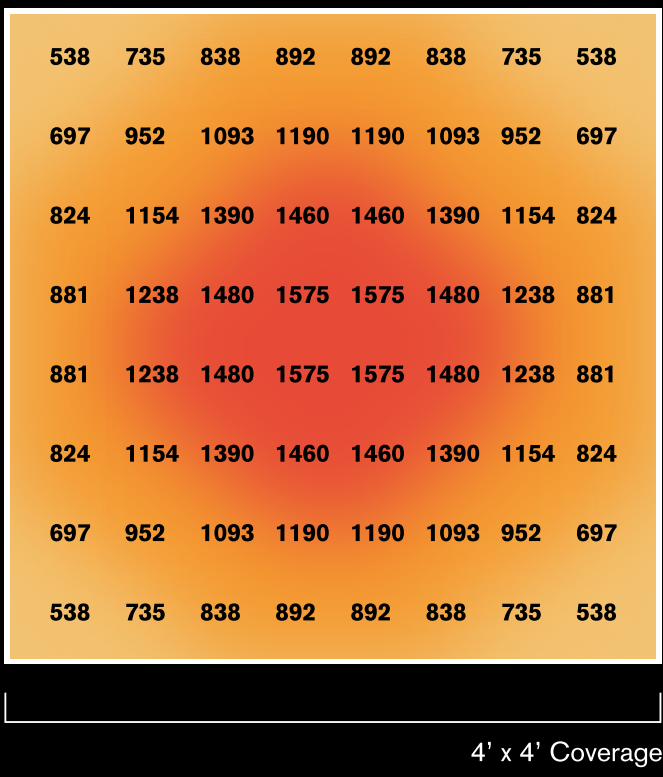

4' x 4' Coverage

SPECTRUM

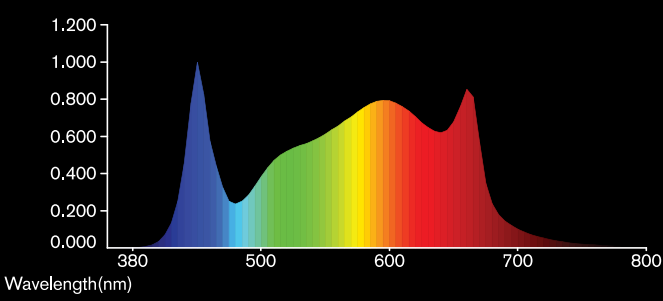

Instruction Manual



Animated Assembly Guide



Live Action Assembly Tutorial

